

## LED STREET LIGHT

## RT570SL SERIES



### Feature

60-70 % energy saving compared to traditional light and save money.

Life span > 50,000.00 Hours, IP65 industrial standards.

Good color rendering RA> 80, multi- color choice :2700-7000K.

Easy installation & free Maintenance.

Environmentally friendly.


### Application

Squares, Schools, Parks, Yards, Residential areas, Factories and Others.


Pole' s Height:6-8m

Road Width:8-12m

### Dimensional



### Polar Candela Distribution



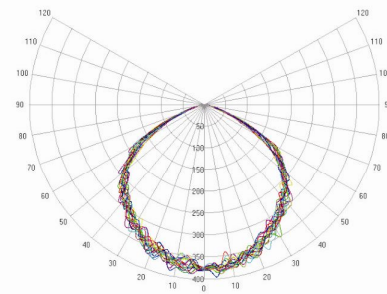


### Techinc Specification

Model No	LED Power	Voltage	PF	LED Lumen	Total Lumen
RT570SL40W	40W	AC (85V-265V) / ( 50-60Hz)	>0.9	110-120lm/W	4400lm
RT570SL50W	50W	AC (85V-265V) / ( 50-60Hz)	>0.9	110-120lm/W	5500lm
RT570SL60W	60W	AC (85V-265V) / ( 50-60Hz)	>0.9	110-120lm/W	6600lm

Model No	Light Efficiency	Beam Angle	Ra	CCT	Life Time	Weight
RT570SL40W	85%	60°	Ra>80	2700K-7000K	>50000Hrs	5.6Kg
RT570SL50W	85%	60°	Ra>80	2700K-7000K	>50000Hrs	5.6Kg
RT570SL60W	85%	60°	Ra>80	2700K-7000K	>50000Hrs	5.6Kg

### ■ Illumination Data

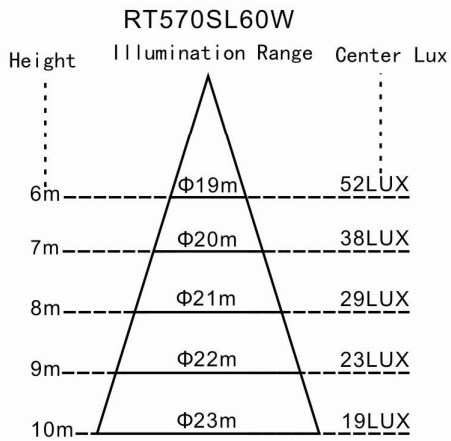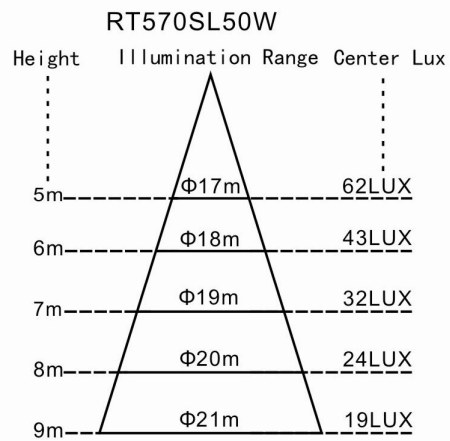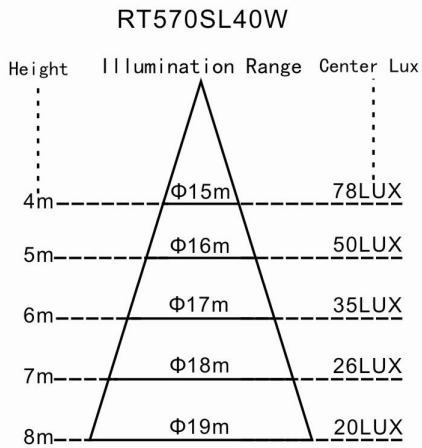

Note: These illumination data for reference exactly data will according application.

### ■ Project Picture

